



BY PRO-JECT AUDIO SYSTEMS

INSTRUCTIONS FOR USE Pro-Ject Power Box S3 Phono

Dear music lover,

Thank you for purchasing a Pro-Ject Audio Systems Power Box S3 Phono.

In order to achieve maximum performance and reliability you should study these instructions for use carefully.



Warning of a hazard for the user, the unit or possible misuse



Important notice


Safety Instructions

AC outlet voltages vary from country to country. Before connecting to the mains, make sure that the voltage in your area meets the voltage requirements printed on the power supply.

Never handle the device while your hands are wet or damp.



Avoid letting liquids enter the device. Never place any item containing liquid, such as a flower vase on or near the device. Never spill any liquid on the device. Never place any naked flame sources, such as lighted candles on or near the device. The product shall not be used in damp or wet locations, next to a bathtub, sink, swimming pool or any other similar conditions.

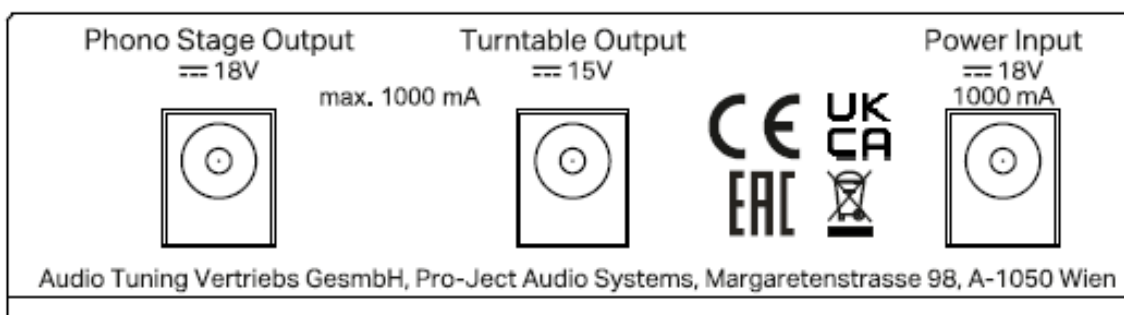

Using the product

Power Box S3 Phono is designed to power a wide range of DC-powered Pro-Ject turntables with 15V and phono preamplifiers with 18V.



*Make all connections whilst the Power Box S3 Phono is **switched off or disconnected from the mains**.*



Interconnection cables are included in the packaging. Original power supplies are no longer required. Ensure that you use the correct cable for your device: The cables are marked on both ends. In case of any doubts, consult user manuals of all connected products or ask your dealer.

Main power switch

The toggle switch on the front panel turns the unit on or off. The blue LED above the switch shows that the unit is switched on.

Led indicators

The LEDs **Turntable** and **Phono Stage** on the front indicate that a device is connected.



*All Pro-Ject Phono Boxes with 18V can be powered with the **Phono Stage Output**.*

*All Pro-Ject Turntables with 15V DC input can be powered with the **Turntable Output**, except RPM5 and higher, X2 and higher, Signature 10 & 12.*

Technical specifications Pro-Ject Power Box S3 Phono

Input Power supply:	115V/230V AC
Output voltage/ripple	1 x 15V \pm 0,5%
Output voltage/ripple	1 x 18V \pm 0,5%
Output current:	both outputs combined max. 1000 mA
Dimension (W x D x H):	103 x 37 x 106 mm
Weight:	370 g

Service

Should you encounter a problem which you are not able to alleviate or identify despite the above information, please contact your dealer for further advice. Only when the problem cannot be resolved there should the unit be sent to the responsible distributor in your country.

Warranty



The manufacturer accepts no responsibility for damage caused by not adhering to these instructions for use. Modification or change to any part of the product by unauthorized persons, release the manufacturer from any liability over and above the lawful rights of the customer.

Copyright, trademarks

Pro-Ject Audio Systems is a Registered Trademark of H. Lichtenegger.

This guide was produced by: Pro-Ject Audio Systems
Copyright © 2022. All rights reserved.

The information was correct at the time of going to press. The manufacturer reserves the right to make changes to the technical specification without prior notice as deemed necessary to uphold the ongoing process of technical development.

Declaration of Conformity

We, **Canor spol. s r.o.**
Družstevná 13925/39
08006 Prešov
Slovakia
(manufacturer)

and

Pro-Ject Audio Systems a division of Audio Tuning GmbH
Margaretenstrasse 98
1050 Vienna,
Austria
(distributor)

declare under our responsibility that the product is in conformity with the provisions of Directives:
2014/35/EU including amendments
2014/30/EU including amendments

STN EN 62368-1:2015 - Safety

STN EN 55035:2018 - Electromagnetic compatibility of multimedia equipment - Immunity requirements

STN EN 55032:2015 - Electromagnetic compatibility of multimedia equipment – Emission requirements